SSL26B SMB

Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 60V

Forward Current - 2 A





DO-214AA/SMB

FEATURES

Metal silicon junction, majority carrier conduction

For surface mounted applications

Low power loss, high efficiency

High forward surge current capability

For use in low voltage, high frequency inverters,

free wheeling, and polarity protection applications

Lead free in comply with EU RoHS 2011/65/EU directives

SSL26B **YFW SSL26**

MECHANICAL DATA

Case: DO-214AA/SMB

Terminals: Solderable per MIL-STD-750, Method 2026

Approx. Weight: 0.095g / 0.003oz

SSL26B

Fig. Typical Junction Capacitance

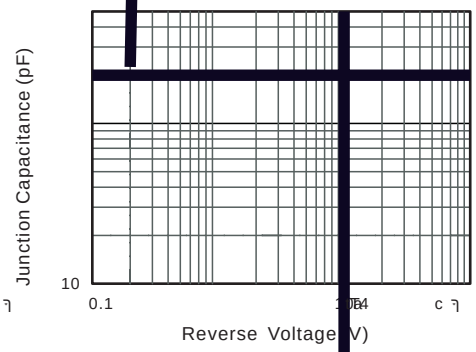

Marking Diagram

Ordering information

Package	Packing Description	Packing Quantity
DO-214AA SMB	!"#!!$%&'()!!$*	'+++,-."#!!$*'++++,-."-)/01*

Package Dimensions

DO-214AA SMB

* * *	Dim.	Millimeter(mm)		mil	
		Min.*	Max.	Min.	Max.*
	2*	34&'*	3455*	65*	78*
	9*	54+8*	54:+*	&8+*	&6;*
	<**	'4'*	'475*	&'+*	&;;*
	9&*	;4+6*	;4;7*	3++*	33+*
	2&*	+4+;*	+43+*	34+*	:47*
	=*	+46*	&4;*	'3*	;7*
	-*	+4&;3*	+4'+;*	8*	&3*
	>*	&47*	343*	:;*	6:*

The recommended mounting pad size

