SSL36B SMB

Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 60V

Forward Current - 3 A

FEATURES

Metal silicon junction, majority carrier conduction
For surface mounted applications
Low power loss, high efficiency





DO-214AA/SMB

SSL36B **YFW SSL36**

A

SSL36B

Fig.1 Forward Current Derating Curve

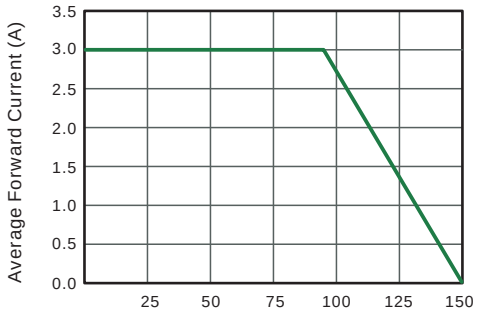

Fig.4 Typical Junction Capacitance

Junction Capacitance (pF)

R

Marking Diagram

Ordering information

Package	Packing Description	Packing Quantity
DO-214AA SMB	!"#!!$%&'()!!$*	'+++,-."#!!$*'++++,-."-)/01*

Package Dimensions

DO-214AA SMB

*	Dim.	Millimeter(mm)	mil
*			
*		Min.	

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controkear