**Trench MOS Barrier Schottky Rectifier**

**Reverse Voltage - 50 V**

**Forward Current - 15 A**

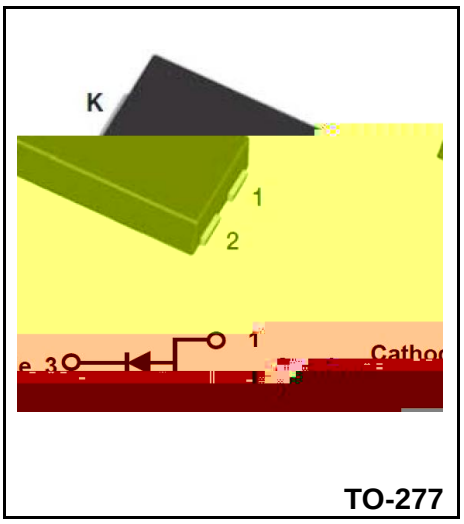


## FEATURES

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead free in comply with EU RoHS 2011/65/EU directives

## MECHANICAL DATA

- Case: TO-277
- Terminals: Solderable per MIL-STD-750, Method 2026

## Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified

**Parameter**

40

## RATINGS AND CHARACTERISTIC CURVES

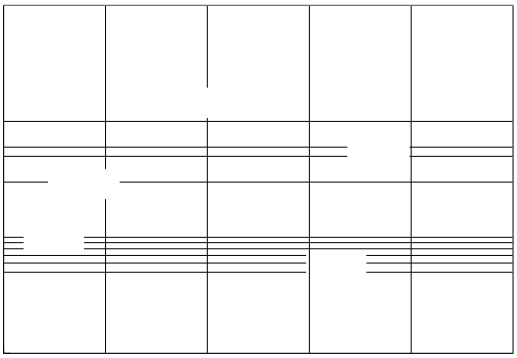

!"#$% &# %! '

( ! ) * !#$% #$+ , ! ' -#, $

| . /" %* | . /"#$% &*0/!#1-#, $ | . /"#$% 23 $-#-4 |
|---|---|---|
| 5 ( 6788 T | | |