- Glass passivated chip
- High surge current capability
- Uitrasoft reco

Characteristics(Typical)

Fig 1-forwardCurrent derating Curve

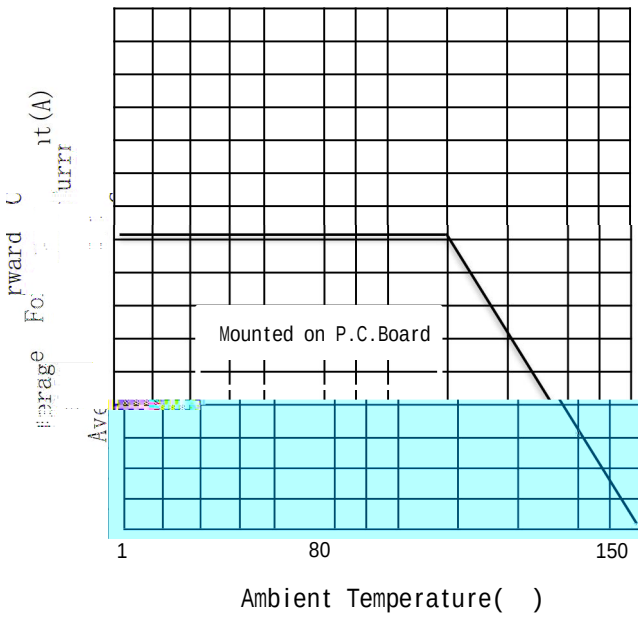


Fig.2-Maximum Non-Repetitive Surge Currnet

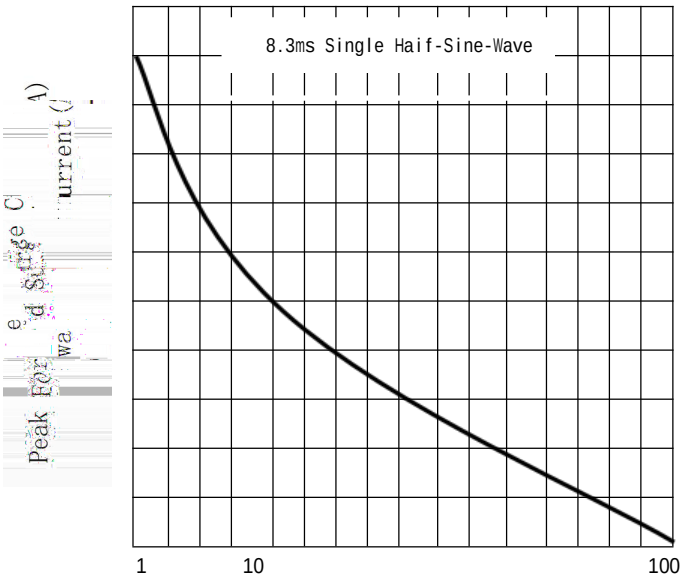


Fig.3-Typical Reverse Characteristics


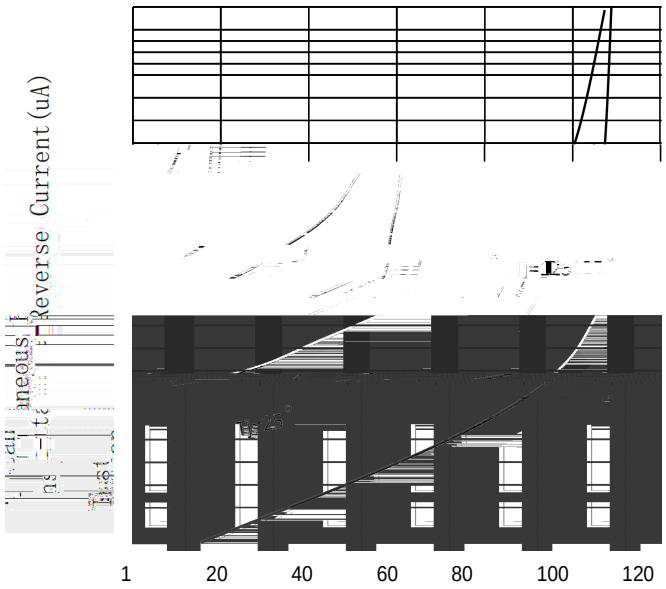


Fig.4-Typical Forwaed Characteristics

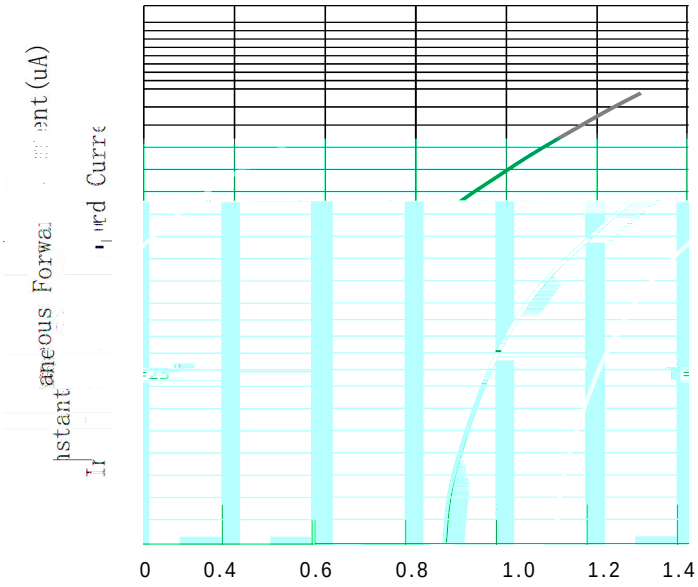

Marking Diagram

Ordering information

KBP	bulk	500PCS/Box 5000PCS/Carton

Package Dimensions

KBP

Dim.	Millimeter(mm)		Dimensions inInch	
	Min.	Max.	Min.	Max.
A	14.3	14.60	0.56	0.57
B	3.0	3.3	0.12	0.13
c	10.45	10.75	0.41	0.42
D	14.41	14.71	0.57	0.58
d	1.40	1.70	0.06	0.07
E	2.0	2.30	0.09	0.09
F	0.90	1.20	0.04	0.05

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medi(st